


Strip Polyurethane Lagging

PRODUCT
FACT
SHEET

The range of TS Global pulley lagging products protect and increase the life of your conveyor belt and pulleys by absorbing the wear between these interfacing components.

In addition, our design and construction improves resistance to slippage, corrosion and abrasion coupled with greater shedding capabilities.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

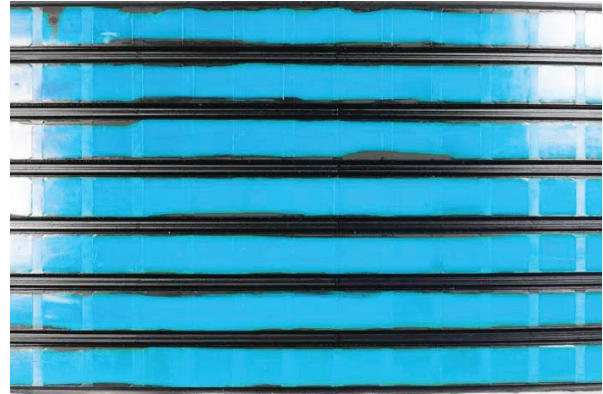

Application

All non-drive pulleys.

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

FEATURES	BENEFITS
Manufactured with CN bonding layer	= Delivers rubber tear bond to the shell which increases longevity
Factory buffed back and edges	= Eliminates hazards associated with buffing = Reduces installation time and cost
Lower DIN abrasion	= Increases longevity of lagging (up to 4 times when compared to rubber lagging) = Maximises re-lagging frequency = Reduces the hazards associated with re-lagging
Can be installed in-situ without having to remove the pulley	= Eliminates hazards associated with removing pulley = Reduces costs associated with removing pulley and crane hire
Lagging packed in plastic film	= Eliminates contamination of the buffed bonding layer

Strip Polyurethane Lagging

PRODUCT
FACT
SHEET



Item Code	Description	Unit	Strip Length		Thickness		Weight	
			(m)	(yards)	(mm)	(inches)	(kg)	(lbs)
29-16-001	Lagging Polyurethane Natural	Strip	6.5	7 1/4	12	1/2	22	49

*Custom sizes up to 4.0m available upon request.

For more information, please contact TS Global directly and/or your TS Global product distributor.

DISTRIBUTED BY

PHONE 1300 418 298 • **EMAIL** sales@tsglobal.net.au • **WEB** www.tsglobal.net.au

WELSHPOOL WA • TOMAGO NSW • MACKAY QLD

ABN 30 603 644 748

