

TUFF Reversing Plough

PRODUCT
FACT
SHEET


The range of TS Global ploughs are proven to protect and increase the life of your capital assets including pulleys and conveyor belt. This is achieved by removing displaced material on the return side of the conveyor belt prior to entering the pulley. It also improves tracking by reducing build-up on the pulley.

The reversing plough balances cost effectiveness with long life functionality makes it the ideal choice for your application.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

Application

For use on bi-directional conveyor belts.

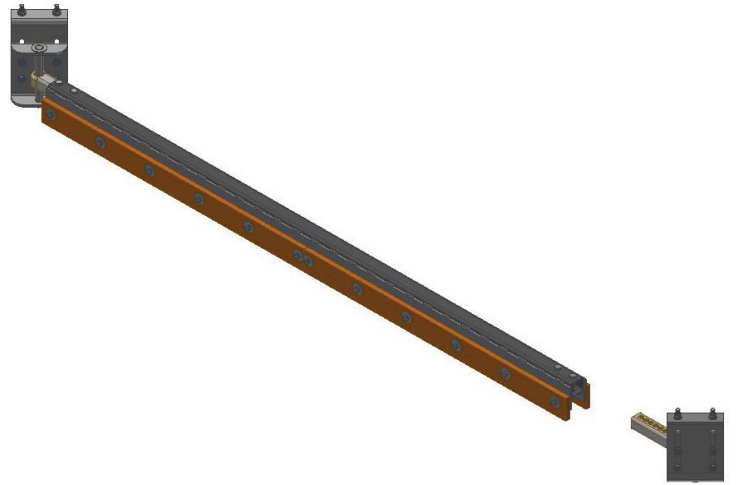

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

FEATURES	BENEFITS
Manufactured from high grade stainless steel	= Increased longevity in structural components
Flexible installation	= Displaced material can be removed to either left or right hand side. This enables safer access for cleaning. Can be adjusted to suit any stringer width
Heavy duty design	= Suitable for all applications
Blades are interchangeable with most brands	= Cost savings achieved without the need to replace the plough
Ability to supply blades with different wear characteristics to suit your specific applications	= Increases life expectancy of polyurethane blades = Optimises performance due to correct blade selection

**Available with deflector for extreme conditions*

TUFF Reversing Plough

PRODUCT
FACT
SHEET



Item Code Natural Blades	Item Code FRAS Blades	Description	Frame Length		Belt Width					Weight	
			(mm)	(inches)	(mm)	(inches)	to	(mm)	(inches)	(kg)	(lbs)
21-10-001	21-11-001	Plough Standard Duty Reversing 0600 to 0750	1150	45 7/8	600	24	to	800	32	35	76
21-10-002	21-11-002	Plough Standard Duty Reversing 0900 to 1050	1650	65	900	36	to	1050	42	43	94
21-12-001	21-13-001	Plough H/Duty Reversing 0600 to 0750	1150	45 7/8	600	24	to	800	32	78	171
21-12-002	21-13-002	Plough H/Duty Reversing 0900 to 1050	1650	65	900	36	to	1050	42	85	187
21-12-003	21-13-003	Plough H/Duty Reversing 1200 to 1500	2150	84 3/8	1200	48	to	1500	60	103	227
21-12-004	21-13-004	Plough H/Duty Reversing 1600 to 1800	2650	104 1/8	1600	64	to	1800	72	116	255

For more information, please contact TS Global directly and/or your TS Global product distributor.

DISTRIBUTED BY

PHONE 1300 418 298 • **EMAIL** sales@tsglobal.net.au • **WEB** www.tsglobal.net.au

WELSHPOOL WA • TOMAGO NSW • MACKAY QLD

ABN 30 603 644 748

